



Grouting of cable ducts with cds-Cable-Joint-Filler

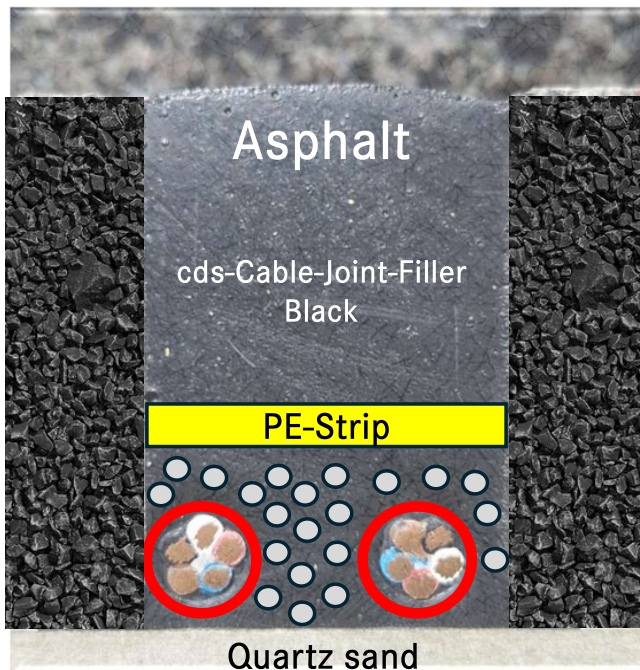

Covering the empty cable duct with PE cord/PE strips/quartz sand prevents damage if the cable sheathing is removed during a later repair.

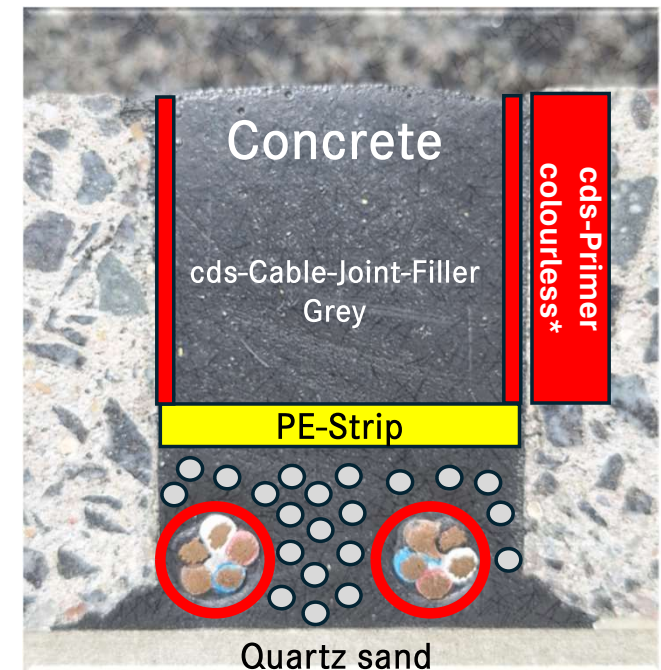

*for optimal adhesion of the sealing compound on the concrete, please prime the concrete edges before grouting

For more information, please contact:

Helena Hoff · cds Polymere GmbH & Co. KG · Gau-Bickelheimer Str. 72 · 55576 Sprendlingen

H.Hoff@cds-polymere.de

Tel.: +496701-935011