


Grouting of cable ducts with cds-Cable-Joint-Filler

In concrete


By covering the empty cable pipe with a PE-string or PE-strip or quartz sand, the cable pipe is not damaged when removing the cable grout at a later repair.

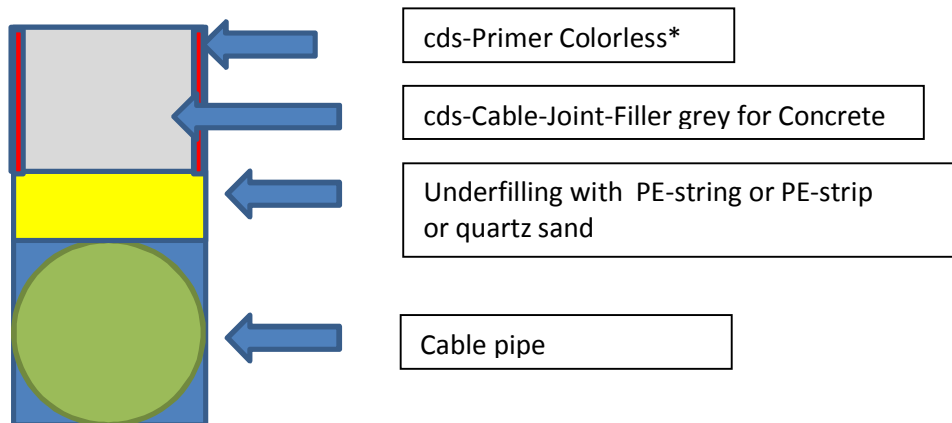

* For optimal adhesion of the sealing compound on the concrete, the concrete edges are primed before grouting

In asphalt

By covering the empty cable pipe with a PE-string or PE-strip or quartz sand, the cable pipe is not damaged when removing the cable grout at a later repair.

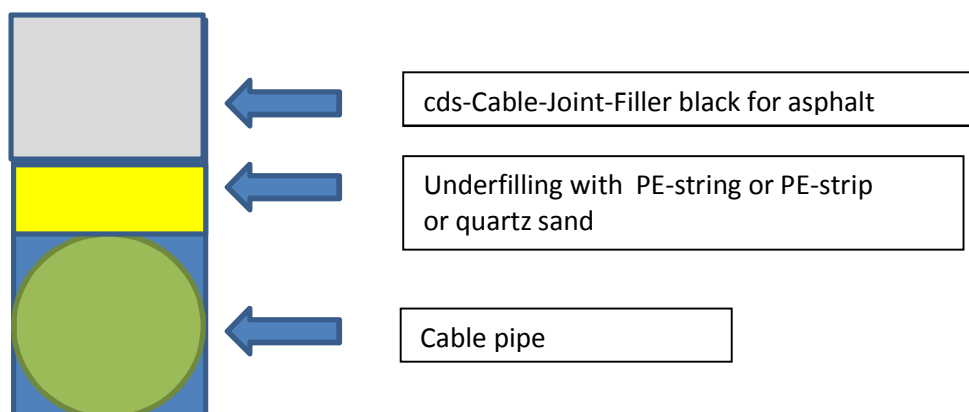

For details contact:

Martin Freimuth, Export Manager, cds Polymere GmbH & Co. KG, Gau-Bickelheimer Str. 72, 55576 Sprendlingen, Germany, m.freimuth@cds-polymere.de, Tel. ++49 67 01 93 50-11.